

8A8DLTP-DEKA

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	250Ah
Capacity at C/20	245Ah
Weight	163 lbs. (74 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)

For Charging Parameters please refer to www.mkbattery.com

Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent Self-sealing

Terminal T (T975)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology



DIMENSIONS


Inches (mm)

Length 21.03 (534 mm)
Including handles

Width 11.00 (279 mm)

Height 10.82 (275 mm)
Including terminals

AGM Cycle Life vs. Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

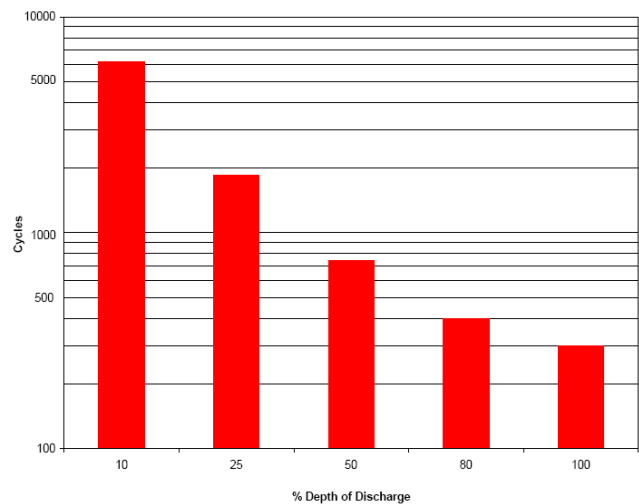

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

