


POWER OUTPUT

Prime Rating — 15 kW (19 kVA)
 Standby Rating — 17kW (20kVA)
 50HZ or 60HZ , 0.8 PF
 Single Phase or 3 Phase

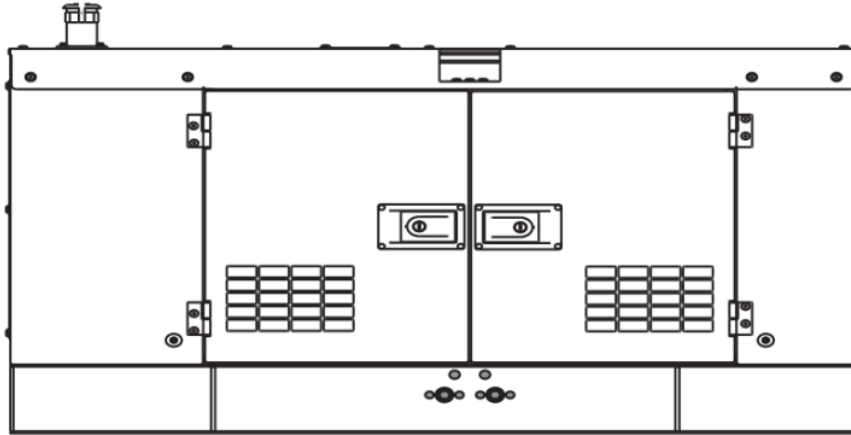

STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
 - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
 - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to $\pm 0.25\%$.
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 65dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel
 E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
 - High visibility LCD display with heated screen and alphanumeric readout.
 - IP65 Protection standard, operational temperature range of -40° to 85° C.
 - Modbus interface for gauge panel and expansion options.
 - DPF cleaningcycle indication.
 - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

SILENT SERIES

DECIBEL LEVELS


Revolving field, self ventilated weatherproof Normal conversation allows substantially lower operating noise levels than competitive designs. Gensets good for home, construction sites, residential, hospital, etc.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 65.0 — **Genset at 7m**
- 60 — Air conditioner at 6m
- 50 — Normal conversation

65.0

 DECIBELS

GENERATOR OUTPUT PANEL

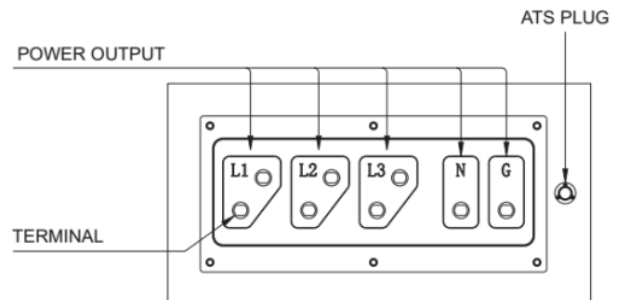

SPECIFICATIONS

Generator Specifications	
Model	Revolving field, self-ventilated weatherproof
Standby Output	17 KW (20KVA)
Prime Output	15 KW (19KVA)
Power Factor	0.8
Voltage Regulation (No load to full load)	±0.5%
No. of Poles	4
Excitation	Brushless with AVR
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load.
Insulation	Class H
Sound Level dB(A) Full load at 7M	65

Fuel System	
Fuel Tank Capacity	11.8 gallons (45 liters)
Fuel Consumption	L / h
At full load	5.7
At 3/4 load	4.2
At 1/2 load	3.3
At 1/4 load	1.9

Control system	
Controller Brand	DEEPSAE
Model	DSE4520
Module	Manual/Auto start/stop module
Standard function	Engine control
	Generator monitoring
	Generator protection
	Specification
Display	Frequency
	Battery voltage
	Running hour
Warning/shutdown	under/over voltage
	under/over speed
	under/over frequency
	Low oil pressure
	High water temperature
Communication port	USB

Engine Specifications	
Make / Model	FAW/ 4DW81-28D
Emissions	/
Starting System	Electrical start
Design	4 cylinder, 4-cycle, water cooled, direct injection, natural intake
Displacement	2.156 Liters
No. cylinders	4
Bore x Stroke	85*95mm
Gross Engine Power Output	29.5hp (22 kW)
Compression Ratio	18.0:1
Engine Speed	1800 rpm
Overspeed Limit	2070 rpm
Oil Capacity	2.06 gallons (7.8 liters)
Coolant Capacity	2.12 gallons (8 liters)
Battery	12V 60Ah x 1

Alternator	
Alternator Brand	KWISE
Alternator Model	KAL164E2
Excitation	Brushless, Self-Excited system
Capacity(KVA)	20.1kva
Power(KW)	16.1kw
Efficiency(%)	82%
Insulation class	Class H
Protection class	Ip23
Steady state voltage regulation	±1%
Voltage control	AVR



WARRANTY*

Generator

12 months from date of purchase or 1000 running hours (whichever occurs

NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.

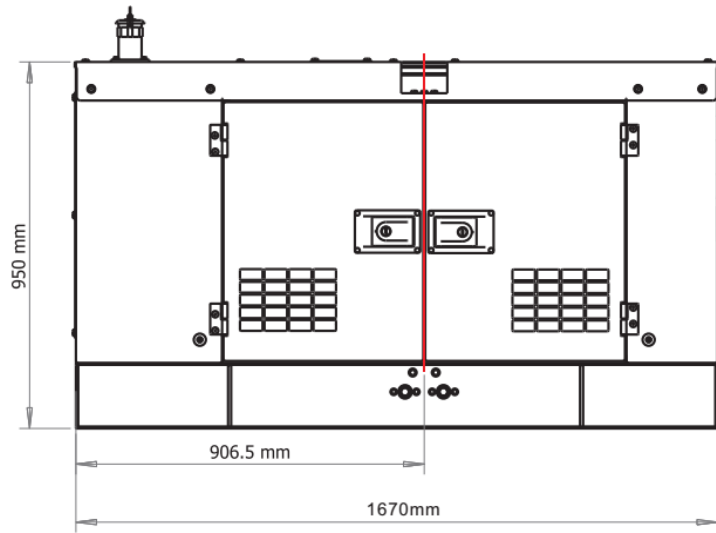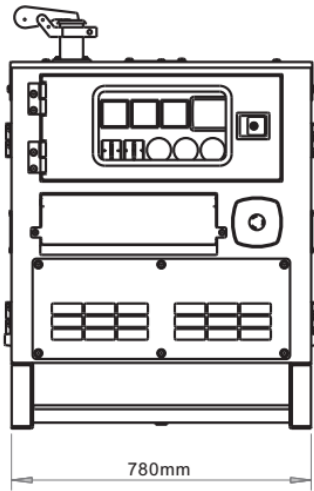

Weight	
Dry Weight	750 kg
Wet Weight	800 kg
Max. Lifting Point Capacity	1,312 kg

